
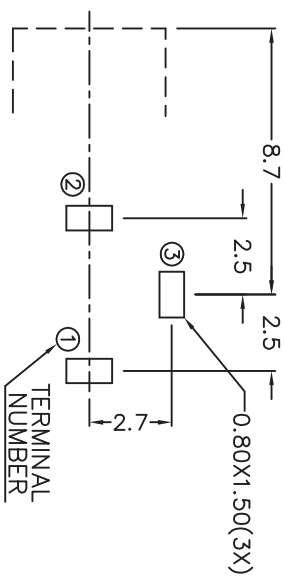


C		B		A	
ZONE	SYMBOL	REVISION	APPROVAL	DATE	
		DWG. NO. TO REVISE	S.T.CHU	8-10-2003	

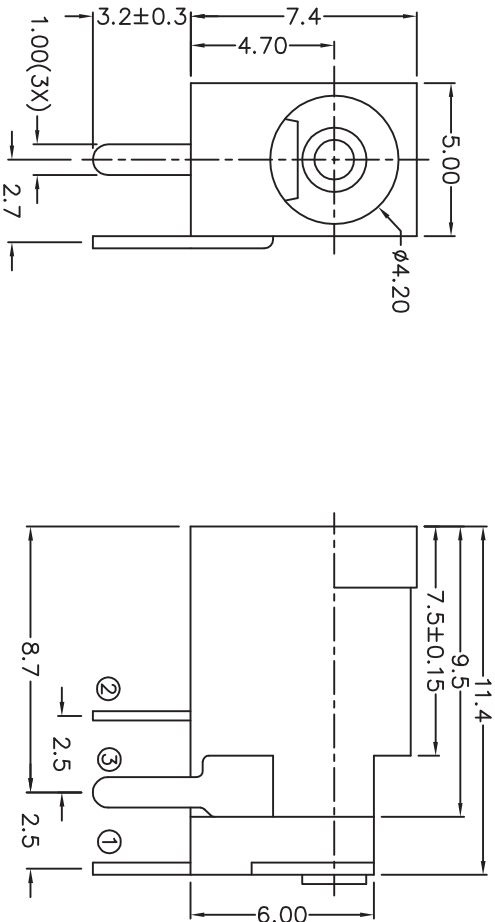

PCB LAYOUT
(BOTTOM VIEW)

MODEL NO.	MSJ-D009
SCHEMATIC	
CENTER PIN	ø0.7mm
	ø1mm
	ø1.3mm
	ø1.65mm

SPECIFICATIONS

- 1 Insulation resistance of adjacent open terminals shall not be less than 50 Megohms when measured with 500 Volts resistance meter.
- 2 Connector shall withstand 500 Volts (RMS) between adjacent open terminal for one minute.
- 3 Contact resistance of normally closed terminals shall not exceed 0.03 ohms when measured at a current of one Ampere by Voltage drop method.
- 4 Connector shall withstand 5,000 cycles of insertions and withdrawal with testing plug , contact resistance shall not exceed 0.1 ohm.

PYEONG HWA ELECTRONICS CO.

PART NAME	DC POWER SOCKET	TOLERANCE UNLESS	0.0±0.2 0.00±0.1	UNIT:	mm	CHECK		DATE		DWG. NO.	1Z\DC009-1-PBT
PART NO.	MSJ-D009	OTHERWISE SPECIFIED:	0.000±0.05	mm		APPROVAL		DATE		SHEET	

F

E

D

C

B

A

DCF-04/A