



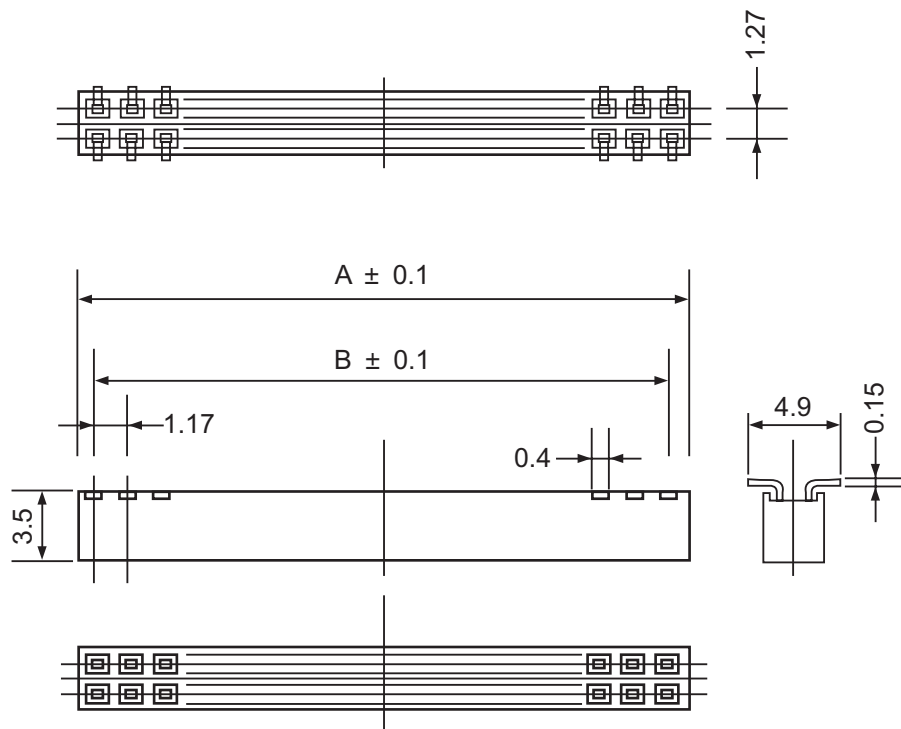

* Remarks : Pin length request to customer
 * Tolerance : $\pm 0.2\text{mm}$

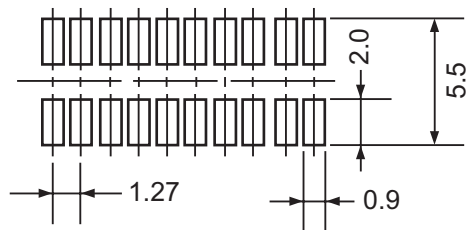

Pin No.	Part No.	A	B
4	P127-F-4DSG (SMD)	3.05	1.27
6	P127-F-6DSG (SMD)	4.32	2.54
8	P127-F-8DSG (SMD)	5.59	3.81
10	P127-F-10DSG (SMD)	6.86	5.08
12	P127-F-12DSG (SMD)	8.13	6.35
14	P127-F-14DSG (SMD)	9.40	7.62
16	P127-F-16DSG (SMD)	10.67	8.89
18	P127-F-18DSG (SMD)	11.94	10.16
20	P127-F-20DSG (SMD)	13.21	11.43
22	P127-F-22DSG (SMD)	14.48	12.70
24	P127-F-24DSG (SMD)	15.75	13.97
26	P127-F-26DSG (SMD)	17.02	15.24
28	P127-F-28DSG (SMD)	18.29	16.51
30	P127-F-30DSG (SMD)	19.56	17.78
34	P127-F-34DSG (SMD)	22.10	20.32
36	P127-F-36DSG (SMD)	23.37	21.59
38	P127-F-38DSG (SMD)	24.64	22.86
40	P127-F-40DSG (SMD)	25.91	24.13
44	P127-F-44DSG (SMD)	28.45	26.67
46	P127-F-46DSG (SMD)	29.72	27.94
48	P127-F-48DSG (SMD)	30.99	29.21
50	P127-F-50DSG (SMD)	32.26	30.48
56	P127-F-56DSG (SMD)	36.07	34.29
60	P127-F-60DSG (SMD)	38.61	36.83
66	P127-F-66DSG (SMD)	42.42	40.64
70	P127-F-70DSG (SMD)	44.96	43.18
80	P127-F-80DSG (SMD)	51.31	49.53

(UNIT : mm)

2	INSULATOR	NYLON-66(GLASS30%)	BLACK
1	CONTACT	PHOSPHOR BRONZE	Tin lead Plating
ITEM	DESCRIPTION	MATERIAL	FINISH
PCB TO PCB CONNECTOR		PYEONG HWA ELECTRONICS CO.	