
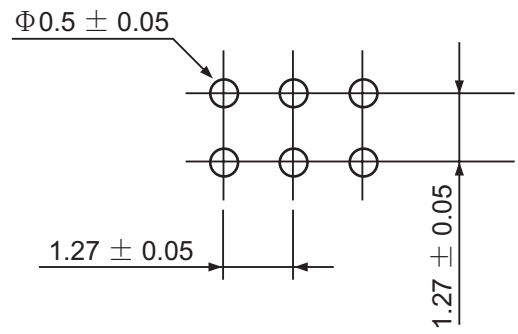
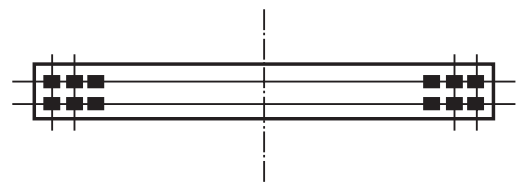

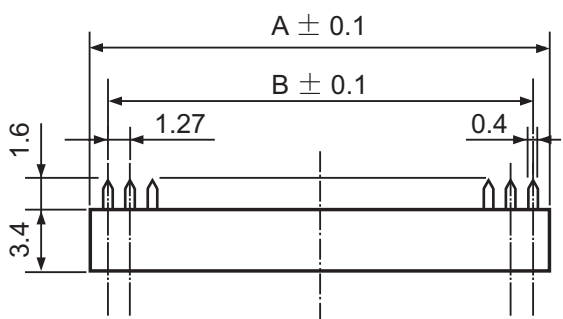


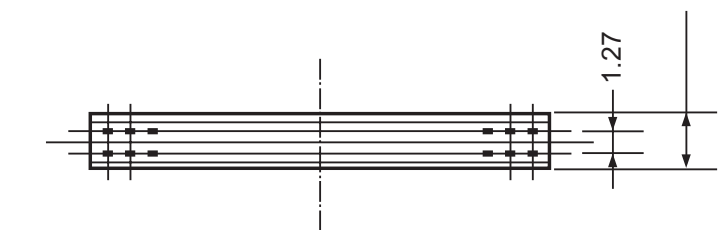

DOUBLE ROW 1.27mm CENTERS
Recommended PCB Hole Patterns

* Remarks : Pin Length Request To Costomer
* Tolerance : ± 0.2

Pin No.	Part No.	A	B
4	P127-F-4DSG	3.05	1.27
6	P127-F-6DSG	4.32	2.54
8	P127-F-8DSG	5.59	3.81
10	P127-F-10DSG	6.86	5.08
12	P127-F-12DSG	8.13	6.35
14	P127-F-14DSG	9.40	7.62
16	P127-F-16DSG	10.67	8.89
18	P127-F-18DSG	11.94	10.16
20	P127-F-20DSG	13.21	11.43
22	P127-F-22DSG	14.48	12.70
24	P127-F-24DSG	15.75	13.97
26	P127-F-26DSG	17.02	15.24
28	P127-F-28DSG	18.29	16.51
30	P127-F-30DSG	19.56	17.78
34	P127-F-34DSG	22.10	20.32
36	P127-F-36DSG	23.37	21.59
38	P127-F-38DSG	24.64	22.86
40	P127-F-40DSG	25.91	24.13
44	P127-F-44DSG	28.45	26.67
46	P127-F-46DSG	29.72	27.94
48	P127-F-48DSG	30.99	29.21
50	P127-F-50DSG	32.26	30.48
56	P127-F-56DSG	36.07	34.29
60	P127-F-60DSG	38.61	36.83
66	P127-F-66DSG	42.42	40.64
70	P127-F-70DSG	44.96	43.18
80	P127-F-80DSG	51.31	49.53

(UNIT : mm)

2	INSULATOR	NYLON-66(GLASS30%)	BLACK
1	PIN	BRASS	GOLD or TIN
ITEM	DESCRIPTION	MATERIAL	FINISH
PCB TO PCB CONNECTOR		PYEONG HWA ELECTRONICS CO.	