
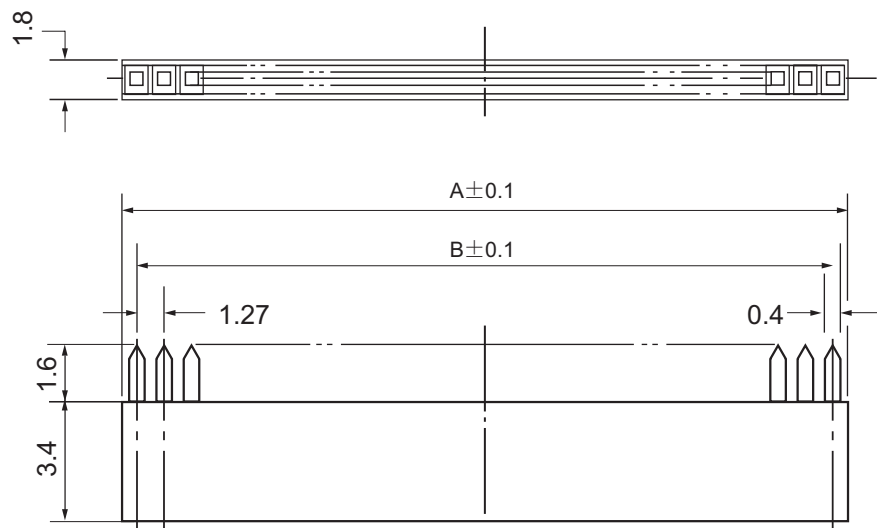


* Remarks : Pin length request to customer
* Tolerance : $\pm 0.2\text{mm}$

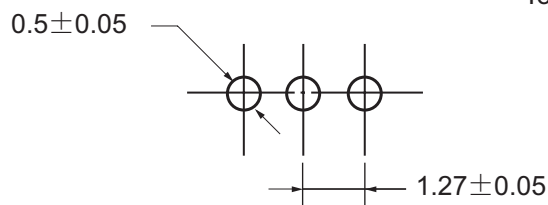

SINGLE ROW 1.27mm CENTERS
Recommended PCB Hole Patterns

Pin No.	Part No.	A	B
2	P127-F-2SSG	3.05	1.27
3	P127-F-3SSG	4.32	2.54
4	P127-F-4SSG	5.59	3.81
5	P127-F-5SSG	6.86	5.08
6	P127-F-6SSG	8.13	6.35
7	P127-F-7SSG	9.40	7.62
8	P127-F-8SSG	10.67	8.89
9	P127-F-9SSG	11.94	10.16
10	P127-F-10SSG	13.21	11.43
11	P127-F-11SSG	14.48	12.70
12	P127-F-12SSG	15.75	13.97
13	P127-F-13SSG	17.02	15.24
14	P127-F-14SSG	18.29	16.51
15	P127-F-15SSG	19.56	17.78
16	P127-F-16SSG	20.83	19.05
17	P127-F-17SSG	22.10	20.32
18	P127-F-18SSG	23.37	21.59
19	P127-F-19SSG	24.64	22.86
20	P127-F-20SSG	25.91	24.13
22	P127-F-22SSG	28.45	26.67
24	P127-F-24SSG	30.99	29.21
26	P127-F-26SSG	33.53	31.75
28	P127-F-28SSG	36.07	34.29
30	P127-F-30SSG	38.61	36.83
34	P127-F-34SSG	43.69	41.91
38	P127-F-38SSG	48.77	46.99
40	P127-F-40SSG	51.31	49.53

(UNIT : mm)

2	INSULATOR	NYLON-66(GLASS30%)	BLACK
1	CONTACT	PHOSPHOR BRONZE	GOLD or TIN
ITEM	DESCRIPTION	MATERIAL	FINISH
PCB TO PCB CONNECTOR		PYEONG HWA ELECTRONICS CO.	