




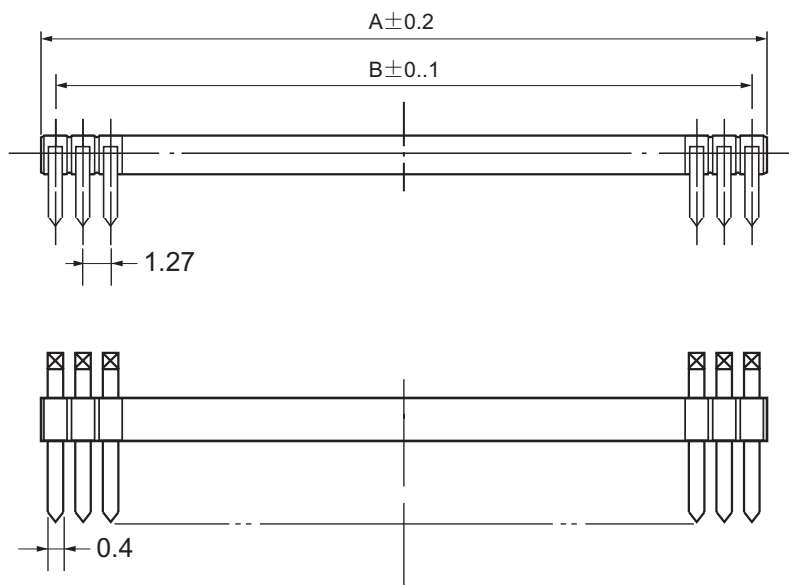

NO	H1
1	1.2
2	1.5
3	2.0
4	2.4
5	3.0



* Remarks : Pin length request to customer
* Tolerance : $\pm 0.2\text{mm}$

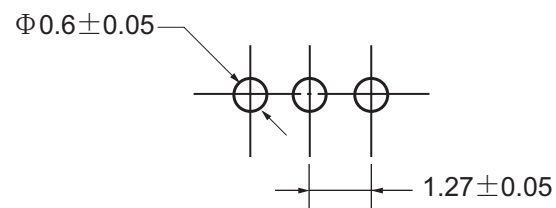

SINGLE ROW 1.27mm CENTERS
Recommended PCB Hole Patterns

Pin No.	Part No.	A	B
1	P127-M-1SAG	1.27	-
2	P127-M-2SAG	2.54	1.27
3	P127-M-3SAG	3.81	2.54
4	P127-M-4SAG	5.08	3.81
5	P127-M-5SAG	6.35	5.08
6	P127-M-6SAG	7.62	6.35
7	P127-M-7SAG	8.89	7.62
8	P127-M-8SAG	10.16	8.89
9	P127-M-9SAG	11.43	10.16
10	P127-M-10SAG	12.70	11.43
11	P127-M-11SAG	13.97	12.70
12	P127-M-12SAG	15.24	13.97
13	P127-M-13SAG	16.51	15.24
14	P127-M-14SAG	17.78	16.51
15	P127-M-15SAG	19.05	17.78
16	P127-M-16SAG	20.32	19.05
17	P127-M-17SAG	21.59	20.32
18	P127-M-18SAG	22.86	21.59
19	P127-M-19SAG	24.13	22.86
20	P127-M-20SAG	25.40	24.13
22	P127-M-22SAG	27.94	26.67
24	P127-M-24SAG	30.48	29.21
26	P127-M-26SAG	33.02	31.75
28	P127-M-28SAG	35.56	34.29
30	P127-M-30SAG	38.10	36.83
40	P127-M-40SAG	50.80	49.53

(UNIT : mm)

2	INSULATOR	NYLON-66(GLASS30%)	BLACK
1	PIN	BRASS	GOLD or TIN
ITEM	DESCRIPTION	MATERIAL	FINISH
HEADER PIN CONNECTOR		PYEONG HWA ELECTRONICS CO.	