


* Remarks : Pin length request to customer
* Tolerance : $\pm 0.2\text{mm}$

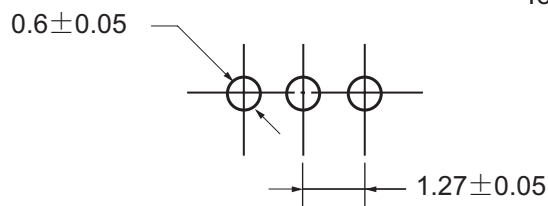

SINGLE ROW 1.27mm CENTERS
Recommended PCB Hole Patterns

Pin No.	Part No.	A	B
2	P127-M-2SSGW	2.54	1.27
3	P127-M-3SSGW	3.81	2.54
4	P127-M-4SSGW	5.08	3.81
5	P127-M-5SSGW	6.35	5.08
6	P127-M-6SSGW	7.62	6.35
7	P127-M-7SSGW	8.89	7.62
8	P127-M-8SSGW	10.16	8.89
9	P127-M-9SSGW	11.43	10.16
10	P127-M-10SSGW	12.70	11.43
11	P127-M-11SSGW	13.97	12.70
12	P127-M-12SSGW	15.24	13.97
13	P127-M-13SSGW	16.51	15.24
14	P127-M-14SSGW	17.78	16.51
15	P127-M-15SSGW	19.05	17.78
16	P127-M-16SSGW	20.32	19.05
17	P127-M-17SSGW	21.59	20.32
18	P127-M-18SSGW	22.86	21.59
19	P127-M-19SSGW	24.13	22.86
20	P127-M-20SSGW	25.40	24.13
22	P127-M-22SSGW	27.94	26.67
24	P127-M-24SSGW	30.48	29.21
26	P127-M-26SSGW	33.02	31.75
28	P127-M-28SSGW	35.56	34.29
30	P127-M-30SSGW	38.10	36.83
34	P127-M-34SSGW	43.18	41.91
38	P127-M-38SSGW	48.26	46.99
40	P127-M-40SSGW	50.80	49.53

(UNIT : mm)

2	INSULATOR	NYLON-66(GLASS30%)	BLACK
1	PIN	BRASS	GOLD or TIN
ITEM	DESCRIPTION	MATERIAL	FINISH
HEADER PIN CONNECTOR		PYEONG HWA ELECTRONICS CO.	