
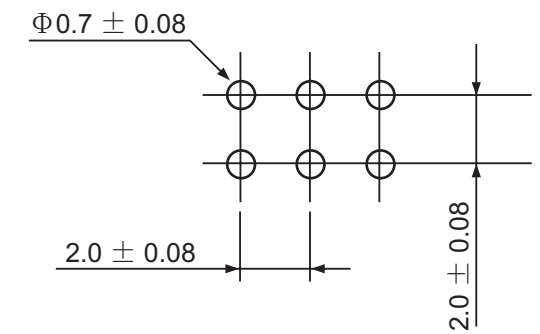
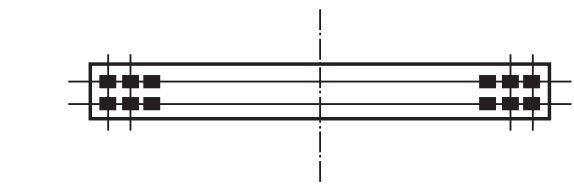

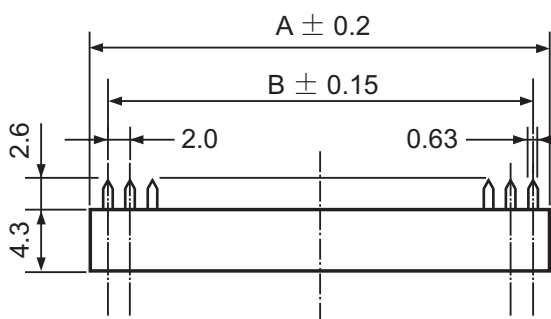


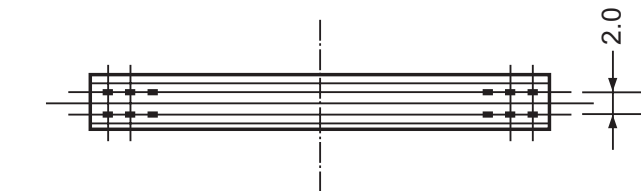

DOUBLE ROW 2.0mm CENTERS
Recommended PCB Hole Patterns

* Remarks : Pin Length Request To Costomer
* Tolerance : $\pm 0.2\text{mm}$

Pin No.	Part No.	A	B
4	P200-F-4DSG	4	2
6	P200-F-6DSG	6	4
8	P200-F-8DSG	8	6
10	P200-F-10DSG	10	8
12	P200-F-12DSG	12	10
14	P200-F-14DSG	14	12
16	P200-F-16DSG	16	14
18	P200-F-18DSG	18	16
20	P200-F-20DSG	20	18
22	P200-F-22DSG	22	20
24	P200-F-24DSG	24	22
26	P200-F-26DSG	26	24
28	P200-F-28DSG	28	26
30	P200-F-30DSG	30	28
32	P200-F-32DSG	32	30
34	P200-F-34DSG	34	32
36	P200-F-36DSG	36	34
40	P200-F-40DSG	40	38
44	P200-F-44DSG	44	42
48	P200-F-48DSG	48	46
50	P200-F-50DSG	50	48
54	P200-F-54DSG	54	52
58	P200-F-58DSG	58	56
60	P200-F-60DSG	60	58
62	P200-F-62DSG	62	60
70	P200-F-70DSG	70	68
80	P200-F-80DSG	80	78

(UNIT : mm)

2	INSULATOR	NYLON-66(GLASS30%)	BLACK
1	PIN	PHOSPHOR BRONZE	GOLD or TIN
ITEM	DESCRIPTION	MATERIAL	FINISH
PCB TO PCB CONNECTOR		PYEONG HWA ELECTRONICS CO.	