
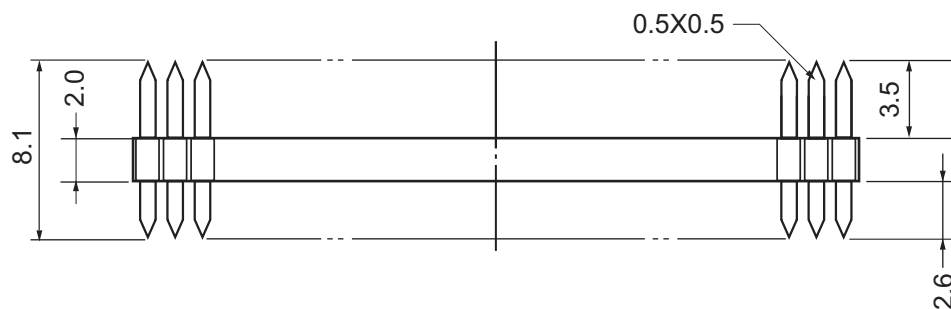
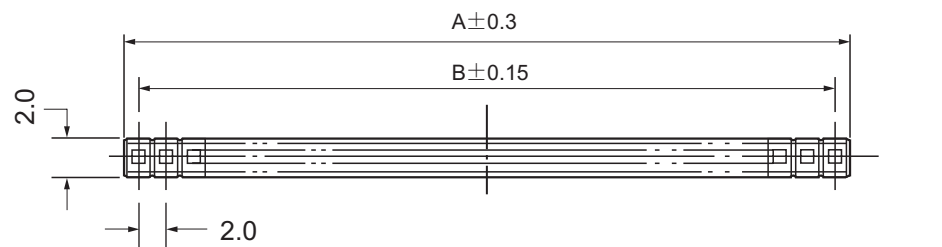


* Remarks : Pin length request to customer
* Tolerance : $\pm 0.2\text{mm}$

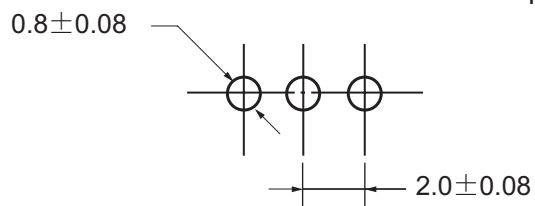

SINGLE ROW 2.0mm CENTERS
Recommended PCB Hole Patterns

Pin No.	Part No.	A	B
1	P200-M-1SSG	2	-
2	P200-M-2SSG	4	2
3	P200-M-3SSG	6	4
4	P200-M-4SSG	8	6
5	P200-M-5SSG	10	8
6	P200-M-6SSG	12	10
7	P200-M-7SSG	14	12
8	P200-M-8SSG	16	14
9	P200-M-9SSG	18	16
10	P200-M-10SSG	20	18
11	P200-M-11SSG	22	20
12	P200-M-12SSG	24	22
13	P200-M-13SSG	26	24
14	P200-M-14SSG	28	26
15	P200-M-15SSG	30	28
16	P200-M-16SSG	32	30
17	P200-M-17SSG	34	32
18	P200-M-18SSG	36	34
19	P200-M-19SSG	38	36
20	P200-M-20SSG	40	38
22	P200-M-22SSG	44	42
24	P200-M-24SSG	48	46
26	P200-M-26SSG	52	50
30	P200-M-30SSG	60	58
32	P200-M-32SSG	64	62
34	P200-M-34SSG	68	66
36	P200-M-36SSG	72	70
40	P200-M-40SSG	80	78

(UNIT : mm)

2	INSULATOR	NYLON-66(GLASS30%)	BLACK
1	PIN	BRASS	GOLD or TIN
ITEM	DESCRIPTION	MATERIAL	FINISH
HEADER PIN CONNECTOR		PYEONG HWA ELECTRONICS CO.	