
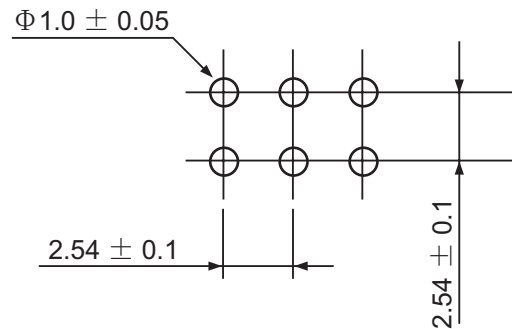
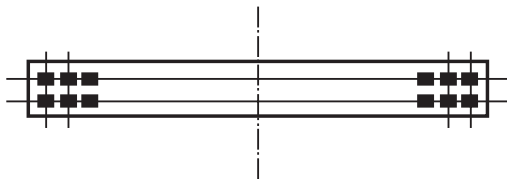

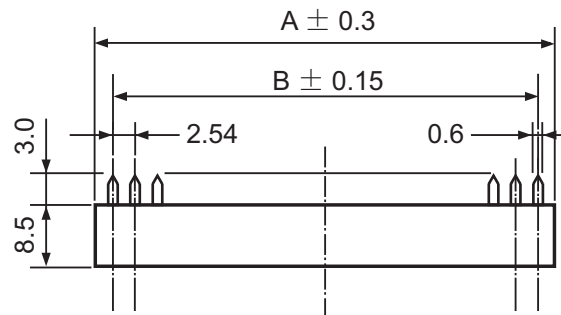


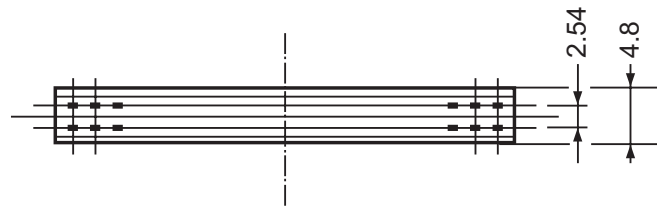

DOUBLE ROW 2.54mm CENTERS
Recommended PCB Hole Patterns

* Remarks : Pin Length Request To Costomer
* Tolerance : $\pm 0.2\text{mm}$

Pin No.	Part No.	A	B
2	P254-F-2DSG	3.00	-
4	P254-F-4DSG	5.54	2.54
6	P254-F-6DSG	10.62	7.62
8	P254-F-8DSG	15.70	12.70
10	P254-F-10DSG	20.78	17.78
12	P254-F-12DSG	25.86	22.86
14	P254-F-14DSG	30.94	27.94
16	P254-F-16DSG	36.02	33.02
18	P254-F-18DSG	41.10	38.01
20	P254-F-20DSG	46.18	43.18
22	P254-F-22DSG	51.26	48.26
24	P254-F-24DSG	56.34	53.34
26	P254-F-26DSG	61.42	58.42
28	P254-F-28DSG	66.50	63.50
30	P254-F-30DSG	71.58	68.58
32	P254-F-32DSG	76.66	73.66
34	P254-F-34DSG	81.74	78.74
36	P254-F-36DSG	86.82	83.82
40	P254-F-40DSG	91.90	88.90
44	P254-F-44DSG	102.06	99.06
48	P254-F-48DSG	112.22	109.22
50	P254-F-50DSG	122.38	119.38
54	P254-F-54DSG	127.46	124.46
58	P254-F-58DSG	137.62	134.62
60	P254-F-60DSG	147.78	144.78
62	P254-F-62DSG	152.86	149.86
70	P254-F-70DSG	157.94	154.94
80	P254-F-80DSG	178.26	175.26

(UNIT : mm)

2	INSULATOR	NYLON-66(GLASS30%)	BLACK
1	PIN	PHOSPHOR BRONZE	GOLD or TIN
ITEM	DESCRIPTION	MATERIAL	FINISH
PCB TO PCB CONNECTOR		PYEONG HWA ELECTRONICS CO.	