


* Remarks : Pin Length Request To Costomer
* Tolerance : ± 0.2

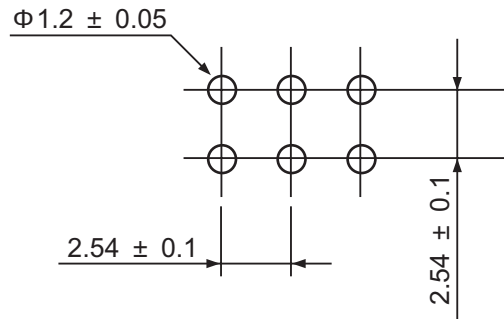

DOUBLE ROW 2.54mm CENTERS
Recommended PCB Hole Patterns

2	INSULATOR	NYLON-66(GLASS30%)	BLACK
1	PIN	BRASS	GOLD or TIN
ITEM	DESCRIPTION	MATERIAL	FINISH
HEADER PIN CONNECTOR		PYEONG HWA ELECTRONICS CO.	

(UNIT : mm)

Pin No.	Part No.	A	B
2	P254-M-2DAG	2.54	-
4	P254-M-4DAG	5.08	2.54
6	P254-M-6DAG	7.62	5.08
8	P254-M-8DAG	10.16	7.62
10	P254-M-10DAG	12.70	10.16
12	P254-M-12DAG	15.24	12.70
14	P254-M-14DAG	17.78	15.24
16	P254-M-16DAG	20.32	17.78
18	P254-M-18DAG	22.86	20.32
20	P254-M-20DAG	25.40	22.86
22	P254-M-22DAG	27.94	25.40
24	P254-M-24DAG	30.48	27.94
26	P254-M-26DAG	33.02	30.48
28	P254-M-28DAG	35.56	33.02
30	P254-M-30DAG	38.01	35.56
32	P254-M-32DAG	40.64	38.01
34	P254-M-34DAG	43.08	40.64
36	P254-M-36DAG	45.72	43.08
38	P254-M-38DAG	48.26	45.72
40	P254-M-40DAG	50.80	48.26
42	P254-M-42DAG	53.54	50.80
44	P254-M-44DAG	55.88	53.54
46	P254-M-46DAG	58.42	55.88
48	P254-M-48DAG	60.96	58.42
50	P254-M-50DAG	63.50	60.96
52	P254-M-52DAG	66.04	63.50
54	P254-M-54DAG	68.58	66.04
56	P254-M-56DAG	71.12	68.58
58	P254-M-58DAG	73.66	71.12
60	P254-M-60DAG	76.20	73.66
62	P254-M-62DAG	78.74	76.20
64	P254-M-64DAG	81.28	78.74
66	P254-M-66DAG	83.82	81.28
68	P254-M-68DAG	86.36	83.82
70	P254-M-70DAG	88.90	86.36
72	P254-M-72DAG	91.44	88.90
74	P254-M-74DAG	93.98	91.44
76	P254-M-76DAG	96.52	93.98
78	P254-M-78DAG	99.06	96.52