
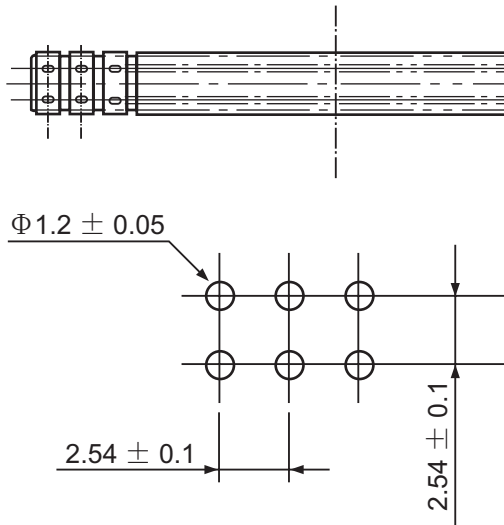
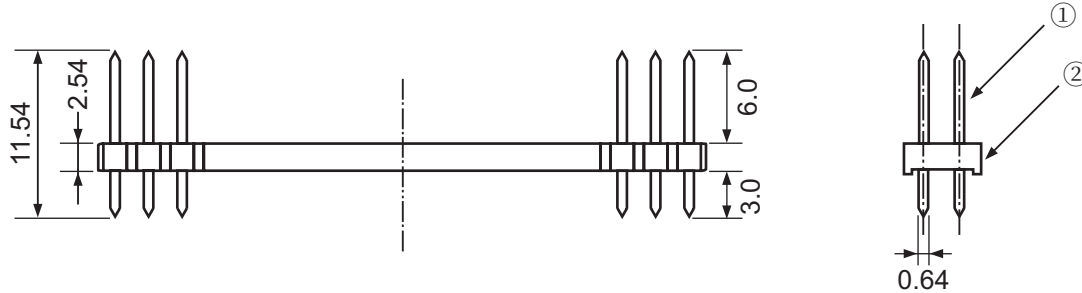


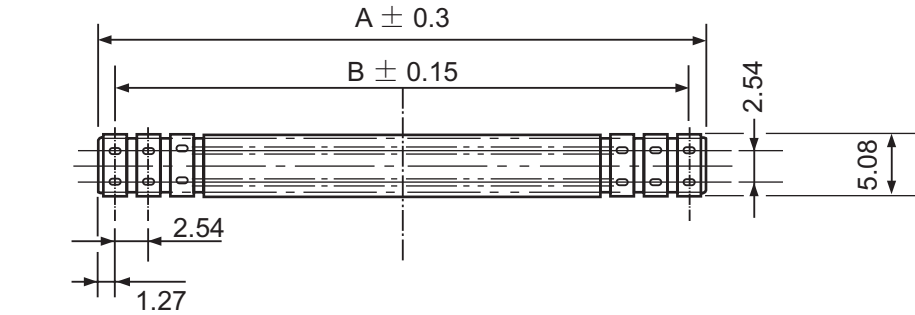

DOUBLE ROW 2.54mm CENTERS
Recommended PCB Hole Patterns

* Remarks : Pin Length Request To Costomer
* Tolerance : ± 0.2

2	INSULATOR	NYLON-66(GLASS30%)	BLACK
1	PIN	BRASS	GOLD or TIN
ITEM	DESCRIPTION	MATERIAL	FINISH
HEADER PIN CONNECTOR		PYEONG HWA ELECTRONICS CO.	

(UNIT : mm)

Pin No.	Part No.	A	B
2	P254-M-2DSG	2.54	-
4	P254-M-4DSG	5.08	2.54
6	P254-M-6DSG	7.62	5.08
8	P254-M-8DSG	10.16	7.62
10	P254-M-10DSG	12.70	10.16
12	P254-M-12DSG	15.24	12.70
14	P254-M-14DSG	17.78	15.24
16	P254-M-16DSG	20.32	17.78
18	P254-M-18DSG	22.86	20.32
20	P254-M-20DSG	25.40	22.86
22	P254-M-22DSG	27.94	25.40
24	P254-M-24DSG	30.48	27.94
26	P254-M-26DSG	33.02	30.48
28	P254-M-28DSG	35.56	33.02
30	P254-M-30DSG	38.01	35.56
32	P254-M-32DSG	40.64	38.01
34	P254-M-34DSG	43.08	40.64
36	P254-M-36DSG	45.72	43.08
38	P254-M-38DSG	48.26	45.72
40	P254-M-40DSG	50.80	48.26
42	P254-M-42DSG	53.54	50.80
44	P254-M-44DSG	55.88	53.54
46	P254-M-46DSG	58.42	55.88
48	P254-M-48DSG	60.96	58.42
50	P254-M-50DSG	63.50	60.96
52	P254-M-52DSG	66.04	63.50
54	P254-M-54DSG	68.58	66.04
56	P254-M-56DSG	71.12	68.58
58	P254-M-58DSG	73.66	71.12
60	P254-M-60DSG	76.20	73.66
62	P254-M-62DSG	78.74	76.20
64	P254-M-64DSG	81.28	78.74
66	P254-M-66DSG	83.82	81.28
68	P254-M-68DSG	86.36	83.82
70	P254-M-70DSG	88.90	86.36
72	P254-M-72DSG	91.44	88.90
74	P254-M-74DSG	93.98	91.44
76	P254-M-76DSG	96.52	93.98
78	P254-M-78DSG	99.06	96.52