


* Remarks : Pin length request to customer
 * Tolerance : $\pm 0.2\text{mm}$

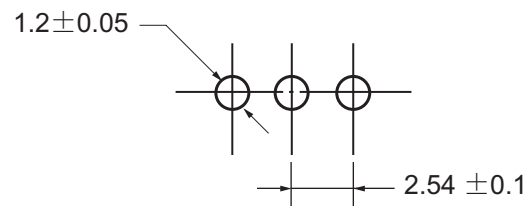

SINGLE ROW 2.54mm CENTERS
 Recommended PCB Hole Patterns

(UNIT : mm)

2	INSULATOR	NYLON-66(GLASS30%)	BLACK
1	PIN	BRASS	GOLD or TIN
ITEM	DESCRIPTION	MATERIAL	FINISH
HEADER PIN CONNECTOR		PYEONG HWA ELECTRONICS CO.	

Pin No.	Part No.	A	B
2	P254-M-2SAG	5.08	2.54
3	P254-M-3SAG	7.62	5.08
4	P254-M-4SAG	10.16	7.62
5	P254-M-5SAG	12.70	10.16
6	P254-M-6SAG	15.24	12.70
7	P254-M-7SAG	17.78	15.24
8	P254-M-8SAG	20.32	17.78
9	P254-M-9SAG	22.86	20.32
10	P254-M-10SAG	25.40	22.86
11	P254-M-11SAG	27.94	25.40
12	P254-M-12SAG	30.48	27.94
13	P254-M-13SAG	33.02	30.48
14	P254-M-14SAG	35.56	33.02
15	P254-M-15SAG	38.01	35.56
16	P254-M-16SAG	40.64	38.01
17	P254-M-17SAG	43.08	40.64
18	P254-M-18SAG	45.72	43.08
19	P254-M-19SAG	48.26	45.72
20	P254-M-20SAG	50.80	48.26
21	P254-M-21SAG	53.54	50.80
22	P254-M-22SAG	55.88	53.54
23	P254-M-23SAG	58.42	55.88
24	P254-M-24SAG	60.96	58.42
25	P254-M-25SAG	63.50	60.96
26	P254-M-26SAG	66.04	63.50
27	P254-M-27SAG	68.58	66.04
28	P254-M-28SAG	71.12	68.58
29	P254-M-29SAG	73.66	71.12
30	P254-M-30SAG	76.20	73.66
31	P254-M-31SAG	78.74	76.20
32	P254-M-32SAG	81.28	78.74
33	P254-M-33SAG	83.82	81.28
34	P254-M-34SAG	86.36	83.82
35	P254-M-35SAG	88.90	86.36
36	P254-M-36SAG	91.44	88.90
37	P254-M-37SAG	93.98	91.44
38	P254-M-38SAG	96.52	93.98
39	P254-M-39SAG	99.06	96.52
40	P254-M-40SAG	101.60	99.06