


* Remarks : Pin length request to customer
* Tolerance : $\pm 0.2\text{mm}$

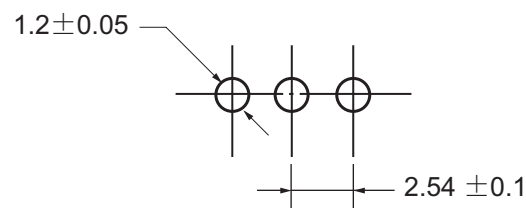

SINGLE ROW 2.54mm CENTERS
Recommended PCB Hole Patterns

2	INSULATOR	NYLON-66(GLASS30%)	BLACK
1	PIN	BRASS	GOLD or TIN
ITEM	DESCRIPTION	MATERIAL	FINISH
HEADER PIN CONNECTOR		PYEONG HWA ELECTRONICS CO.	

(UNIT : mm)

Pin No.	Part No.	A	B
2	P254-M-2SSG	5.08	2.54
3	P254-M-3SSG	7.62	5.08
4	P254-M-4SSG	10.16	7.62
5	P254-M-5SSG	12.70	10.16
6	P254-M-6SSG	15.24	12.70
7	P254-M-7SSG	17.78	15.24
8	P254-M-8SSG	20.32	17.78
9	P254-M-9SSG	22.86	20.32
10	P254-M-10SSG	25.40	22.86
11	P254-M-11SSG	27.94	25.40
12	P254-M-12SSG	30.48	27.94
13	P254-M-13SSG	33.02	30.48
14	P254-M-14SSG	35.56	33.02
15	P254-M-15SSG	38.01	35.56
16	P254-M-16SSG	40.64	38.01
17	P254-M-17SSG	43.08	40.64
18	P254-M-18SSG	45.72	43.08
19	P254-M-19SSG	48.26	45.72
20	P254-M-20SSG	50.80	48.26
21	P254-M-21SSG	53.54	50.80
22	P254-M-22SSG	55.88	53.54
23	P254-M-23SSG	58.42	55.88
24	P254-M-24SSG	60.96	58.42
25	P254-M-25SSG	63.50	60.96
26	P254-M-26SSG	66.04	63.50
27	P254-M-27SSG	68.58	66.04
28	P254-M-28SSG	71.12	68.58
29	P254-M-29SSG	73.66	71.12
30	P254-M-30SSG	76.20	73.66
31	P254-M-31SSG	78.74	76.20
32	P254-M-32SSG	81.28	78.74
33	P254-M-33SSG	83.82	81.28
34	P254-M-34SSG	86.36	83.82
35	P254-M-35SSG	88.90	86.36
36	P254-M-36SSG	91.44	88.90
37	P254-M-37SSG	93.98	91.44
38	P254-M-38SSG	96.52	93.98
39	P254-M-39SSG	99.06	96.52
40	P254-M-40SSG	101.60	99.06