

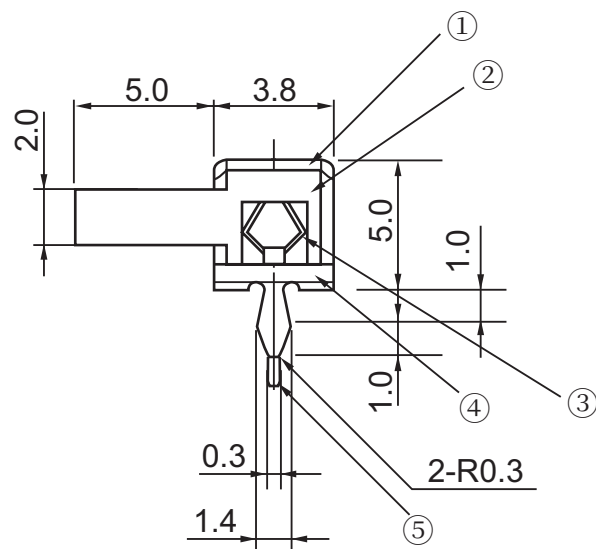


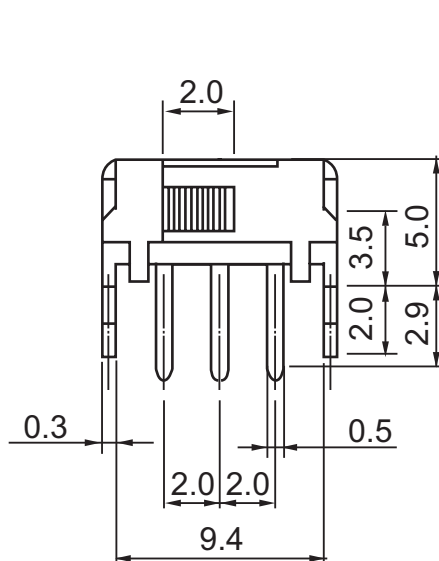


NOTE

1. RATING : DC30V, 0.3A
2. TRAVEL : 2mm
3. OPERATING FORCE : 200gf $\pm$ 150gf
4. CIRCUIT : IC-2P
5. TIMING : NON SHORTING
6. GENERAL TOLERANCE : ± 0.3

3- $\Phi 0.7 \pm 0.1$ Holes

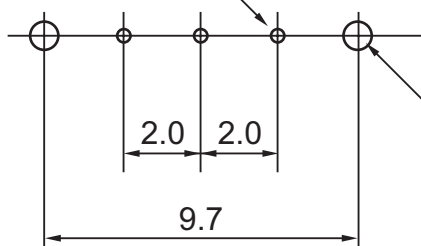

PCB DIMENSION



CIRCUIT DIAGRAM

2- $\Phi 1.4 \pm 0.3$ Holes

(UNIT : mm)

NO	PARTS NAME	Q'TY	MATERIAL	REMARK
1	FRAME	1	SPCC-SD	Sn 3
2	SLIDE	1	NYLON	BLACK
3	CLIP	1	C5210R-EH	Ag 0.5 μ
4	INSULATOR	1	PHENOL	
5	TERMINAL	3	C2680R-EH	Ag 1 μ
SLIDE SWITCH MSS 12003			PYEONG HWA ELECTRONICS CO.	