

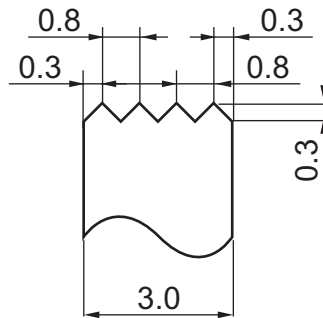
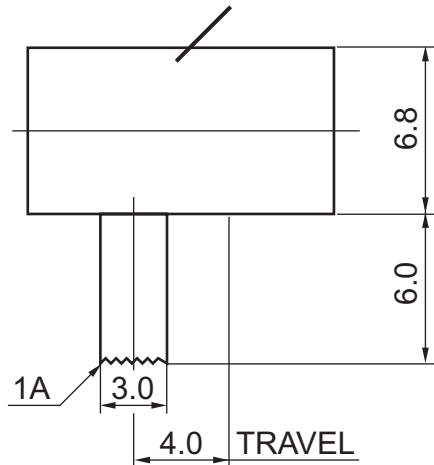



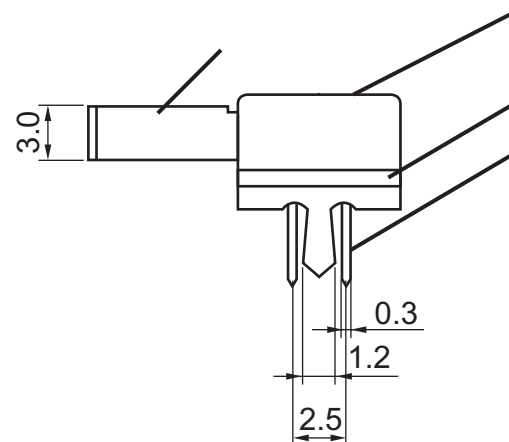


1A DETAIL

NOTE

1. RATING : DC30V, 0.3A
2. CIRCUIT : 2C2P
3. TIMMING : NON SHORTING
4. TRAVEL : 4mm
5. OPERATING FORCE : $250 \pm 100\text{gf}$
6. TERMINAL : PCB BOARD TERMINAL
7. GENERAL TOLERANCE : $\pm 0.3\text{mm}$

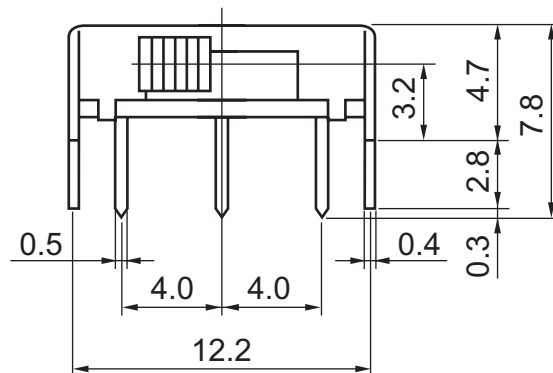

CIRCUIT DIAGRAM

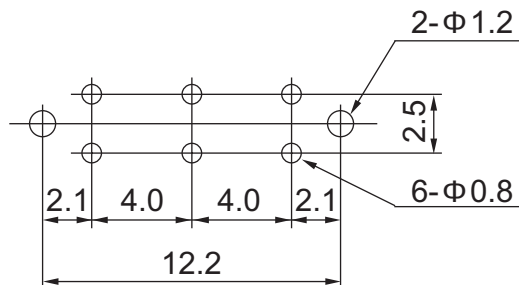

PCB DIMENSION

DATE : NOV. 19. 03.		
DRAWN	CHECKED	APPROVED
		

(UNIT : mm)				
NO	PARTS NAME	Q'TY	MATERIAL	REMARK
	FRAME	1	SPCC-D	Sn 3
	SLIDER	1	ACETAL	BLACK
	INSULATOR	1	PHENOL	Ag 1 μ
	TERMINAL	2	C2680R-EH	
	C/SPRING	1	SUS 304	Ag 0.5 μ

SLIDE SWITCH
MSS-22016-6mm

PYEONG HWA
ELECTRONICS CO.