





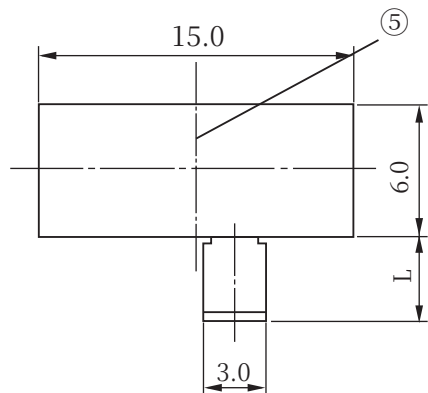


KNOB FORM

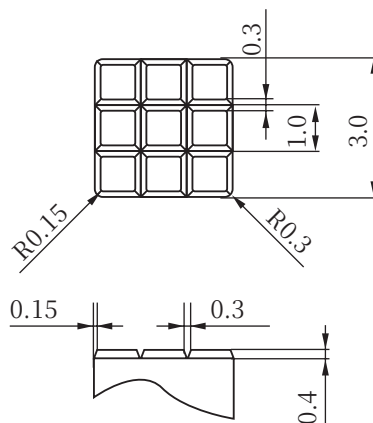


NOTE

1. RATING : DC30V, 0.2A
2. CIRCUIT : 2C2P
3. TRAVEL : 2+2mm
4. OPERATING FORCE : $\begin{matrix} a \rightarrow b & c \\ a & \rightarrow b \rightarrow c \end{matrix}$ $200gf \pm 100gf$
 $300gf \pm 100gf$
5. TIMING : NON SHORTING
6. KNOB L : 4, 6mm
7. GENERAL TOLERANCE $\pm 0.3mm$

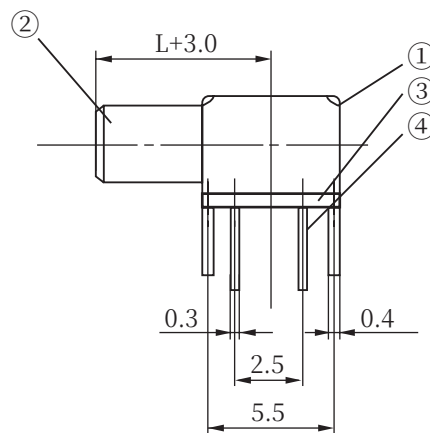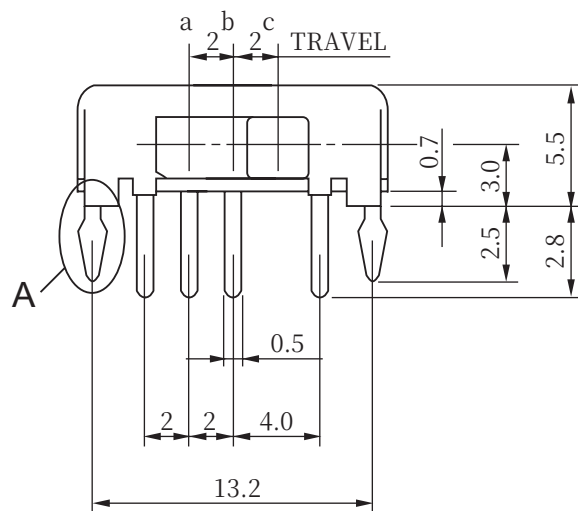


DETAIL A

CIRCUIT DIAGRAM

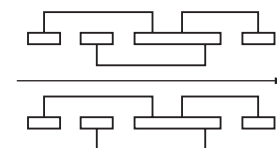

(UNIT : mm)

PCB DIMENSION

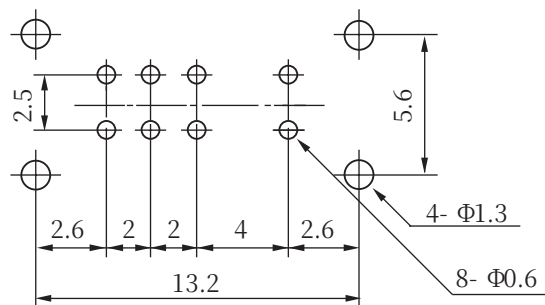

DATE : 2005. 01. 16

DRAWN

CHECKED

APPROVED



NO	PARTS NAME	Q'TY	MATERIAL	REMARK
①	FRAME	1	SPCC- SD	Sn 3
②	SLIDER	1	P.B.T	
③	INSULATOR	1	PHENOL	
④	TERMINAL	2	BRA- EH	Ag 1 μ
⑤	C/ SPRING	1	STAIN	
SLIDE SWITCH MSS-23674			PYEONG HWA ELECTRONICS CO.	